

BEST AVAILABLE COPY

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 December 2003 (11.12.2003)

PCT

(10) International Publication Number
WO 03/101840 A1

(51) International Patent Classification⁷: **B65D 5/38**, 75/38, 50/04

(21) International Application Number: PCT/SE02/01600

(22) International Filing Date:
6 September 2002 (06.09.2002)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0201610-3 30 May 2002 (30.05.2002) SE

(71) Applicant (for all designated States except US): **STORA ENSO ACTIVATION AB** [SE/SE]; P O Box 70395, S-107 24 STOCKHOLM (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(72) Inventor; and
(75) Inventor/Applicant (for US only): **EHRLUND, Åke** [SE/SE]; Älvkvamsvägen 177, S-163 51 SPÅNGA (SE).

(74) Agents: **ALBIHNS STOCKHOLM AB** et al.; P O Box 5581, S-114 85 STOCKHOLM (SE).

(54) Title: CHILD RESISTANT PACKAGE WITH SLIDABLE TRAY SECTION

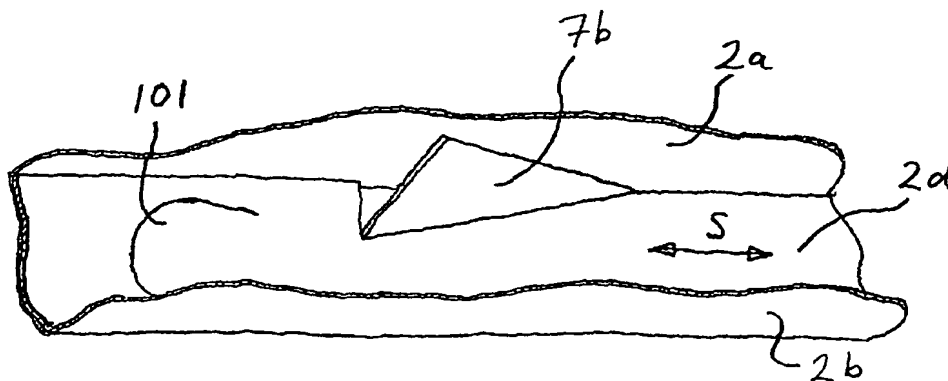

(57) Abstract: A package is proposed, comprising a sleeve (2) of essentially parallelepipedal shape, and an insert (3) which can be inserted into and withdrawn from the sleeve (2) in a sliding direction (S) through an opening (4) in the sleeve (2), the sleeve (2) comprising four longitudinal walls (2a, 2c) which are essentially parallel to the sliding direction (S). The package is characterized in that the sleeve is provided with a first stop tab (7) which extends from a first (2c) to a second (2a) of the longitudinal walls, the tab being at least partly separated from the first longitudinal wall (2c) and the second longitudinal wall (2a) in that the insert has a first locking edge (9a), the insert being prevented, upon contact of the first locking edge with the first stop tab (7a), from moving out of the sleeve, and in that the first locking edge (9a) can, by elastic deformation of a part of the insert (3) by means of manoeuvring by a user, be moved so that its movement past the first stop tab (7a) is made possible.

WO 03/101840 A1